



**LIFT ULTIMATE**  
GARAGE DOOR OPENER

**MODELO: 1500N**



**MODELO**  
**LIFT ULTIMATE**  
**1500N**


La mejor **calidad** y **precio** que necesitas!

- Fabricación
- Instalación
- Mantenimiento

## ALUMINUM RAIL



LED lamp

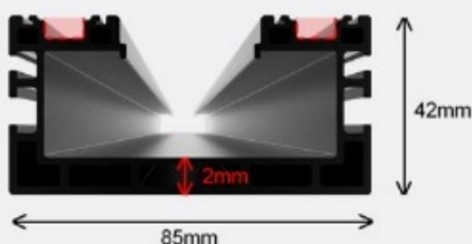

• Red dotted wire frame is lamp bar groove.




| Track Length Specification | 3000mm | 3500mm | 4000mm                                                                        | 4500mm | 5000mm |
|----------------------------|--------|--------|-------------------------------------------------------------------------------|--------|--------|
| Length Of LED Lamp         | 1000mm | 2000mm | • Two kinds of specification can be spliced according to your own preference. |        |        |

## BUILT-IN LITHIUM BATTERY




- Small Size : 90\*148\*38mm, 0.3kg
- Large Capacity : 24V 2Ah
- Long Standby : 1 week
- Reliable Output : 100 cycles
- Durability: 5 years





## PARAMETER

|                                |                             |
|--------------------------------|-----------------------------|
| Max. peak pulling force        | 1500N                       |
| Input voltage                  | 220-240V/ 110-127V, 50-60HZ |
| Max. opening speed             | 160mm/second                |
| Max. door height               | 2100-4200mm                 |
| Bottom base material           | Steel                       |
| Track material                 | Aluminum alloy              |
| Drive mechanism                | Chain                       |
| Max. door area                 | 25m <sup>2</sup>            |
| Max. door weight               | 200kg                       |
| Max lift under spring balanced | 50kg                        |
| Memory code capacity           | 50pcs                       |

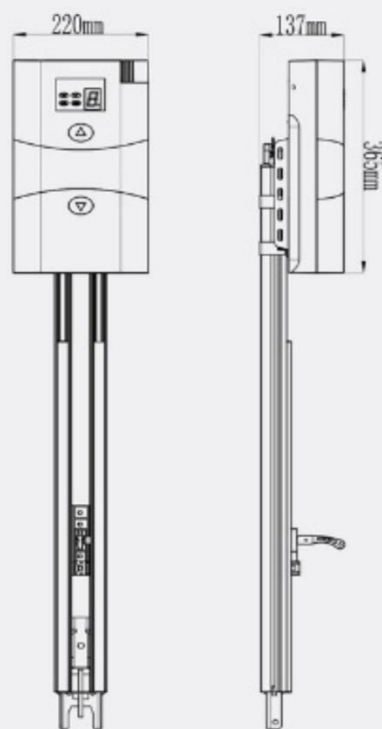

## FEATURES



### RELIABLE

- 433MHz/868MHz/Rolling Code



### SMART

- Available Terminals For Extra Device
- Automatic Closing Setting
- Lamp Control Setting
- Partial Opening (height) Setting
- Travel Speed Setting (door dependent)
- L.E.D Off Delay Time Setting (1min \*N N=1--9)



### SAFE

- Maintenance Alarm
- Photo Cell ON/OFF Setting
- Transformer Overload Protection
- Available Terminal For Pass Door Safety
- Available Terminal For Fire Alarm

## OPTIONAL ACCESSORIES



### ON-RAIL LED LAMP – LL01

- 24V, 600lm
- Warm and white light are optional
- Easy installation

|                    |        |        |
|--------------------|--------|--------|
| Length Of LED Lamp | 1000mm | 2000mm |
|--------------------|--------|--------|

\* Two kinds of specification can be spliced according to your own preference.



### WALL SWITCH – WWS01

- 3 buttons
- 433.92 MHz/868 MHz
- Rolling code technology



### WIRELESS KEYPAD – WK01

- Code with password
- 2 channels, 433.92 MHz/868 MHz
- Rolling code technology



### PHOTO CELL – PC02

- 12V or 24V AC/DC power
- The beams inside can be rotated 180 degrees to allow alignment irrespective of the base fitting
- Normally open or normally closed contacts optional



### LITHIUM BATTERY – BB01

- 24V 2Ah